


Installation dimensions for EUROFIX-cable glands with metric connection thread

Cable glands type:						Installation dimensions		Center distance for connection thread			Center distance for through hole:			
EUROFIX				FLEXOFIX		Connection-thread-size:	SW: Cable gland	INDIVIDUAL: see picture 1	IN SERIES: see picture 2	Mounting hole Diameter	SW: Cable gland	SW: Locknut	INDIVIDUAL: see picture 1	IN SERIES: see picture 2
MZKV12		MZXV12	MZ1V12	MKKV12	FKV12	M12x1.5	15	18	24	12,5 +0.2/-0.4	15	17	20	26
MZKV16	MZRV16	MZXV16	MZ1V16	MKKV16	FKV16	M16x1.5	20	23	29	16,5 +0.2/-0.4	20	22	25	31
MZKV20	MZRV20	MZXV20	MZ1V20	MKKV20	FKV20	M20x1.5	24	27	33	20,5 +0.2/-0.4	24	26	30	36
MZKV21			MZ1V21	MKKV21		M20x1.5	27	31	37	20,5 +0.2/-0.4	27	30	34	40
MZKV25	MZRV25	MZXV25	MZ1V25	MKKV25	FKV25	M25x1.5	28	33	39	25,5 +0.2/-0.4	28	32	37	43
MZKV32	MZRV32	MZXV32	MZ1V32		FKV32	M32x1.5	36	42	48	32,5 +0.2/-0.4	36	46	47	53
MZKV33			MZ1V33			M32x1.5	42	48	54	32,5 +0.2/-0.4	42	41	51	57
MZKV40		MZXV40	MZ1V40			M40x1.5	46	51	59	40,5 +0.2/-0.4	46	50	57	65
MZKV50		MZXV50	MZ1V50			M50x1.5	55	61	69	50,5 +0.2/-0.4	55	60	67	75
MZKV63			MZ1V63			M63x1.5	65	73	82	63,5 +0.2/-0.4	65	75	84	92
HV20						Tr.20x2	24	27	33		24			
HV21						Tr.23x2	27	31	37		27			
GD23M20		MZXV20				M20x1.5				23,5 +0.2/-0.4	24		30	36

= UL/UR-Admission

Picture 1:

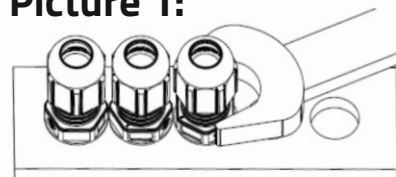


Fitting the cable glands:

Single = One after the other

Mounting tool:

Open-end wrench, water pump pliers or similar

Picture 2:

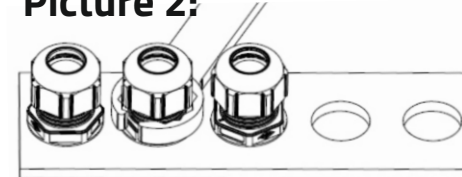

Fitting the cable glands:

In row

Mounting tool:

Union nut wrench according to DIN 3118.



YOUR CONTACT PERSON: Armin Stamm | Tel.: +49 6452-9334-0 | verkauf@cena.de


Installation dimensions for EUROFIX-cable glands with Pg-Connection thread

Cable glands type:		Installation dimensions		Center distance for connection thread			Center distance for through hole:			
EUROFIX	FLEXOFIX	Connection-thread-size:	SW: Cable gland	INDIVIDUAL: see picture 1	IN SERIES: see picture 2	Mounting hole Diameter	SW: Cable gland	SW: Locknut	INDIVIDUAL: see picture 1	IN SERIES: see picture 2
ZKV07	FKVPG07	Pg 7	15	18	24	13,00 ±0.2	15	19	22	27
ZKV09	FKVPG09	Pg 9	19	22	28	15,50 ±0.2	19	22	23	30
ZKV11	FKVPG11	Pg 11	22	26	32	19,00 ±0.2	22	24	27	32
ZKV13	FKVPG13	Pg 13.5	24	27	33	21,00 ±0.2	24	27	30	35
ZKV16	FKVPG16	Pg 16	27	31	37	23,00 ±0.2	27	30	34	39
ZKV21	FKVPG21	Pg 21	33	38	44	29,00 ±0.2	33	36	40	45
ZKV29		Pg 29	42	48	54	37,50 ±0.3	42	46	51	56
ZKV36		Pg 36	55	61	69	47,50 ±0.3	55	60	67	74
ZKV42		Pg 42				54,50 ±0.3		65		
ZKV48		Pg 48	65	73	82	60,50 ±0.3	65	70	79	87

 = UL/UR-Admission


 **YOUR CONTACT PERSON:** Armin Stamm | Tel.: +49 6452-9334-0 | verkauf@cena.de

Picture 1:

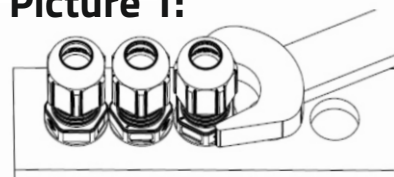

Fitting the cable glands:
Single = One after the other
Mounting tool:
Open-end wrench, water pump pliers or similar

Picture 2:

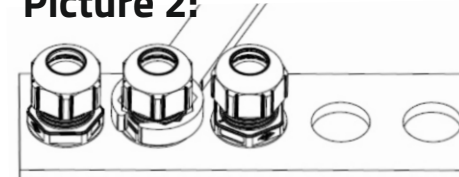

Fitting the cable glands:
In row
Mounting tool:
Union nut wrench according to DIN 3118.